




802008..12

## CITY 03

Round pole-top mounted luminaire for outdoor installation on a pole diam. 60 mm, central supporting arm, with downward light distribution. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws Built-in LED driver/s, with 12 to 48 CREE XP-G3 LED. IP66 rating.

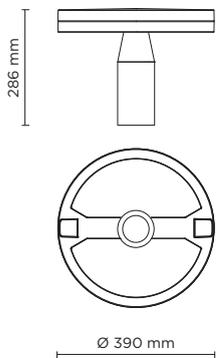

ROTSYMMETRICAL



CYCLE ROUTE / PEDESTRIAN



STREET



### Technical features



### Technical data

IP Rating	IP66
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Light source	NR. 12 -> 48 x 1.5W CREE "XP-G3" LED
Gasket	Silicone rubber
Glass	Tempered
Transformer	Electronic transformer 220/240V 50/60Hz included
Power cable	3 m neoprene power cable included
Weight	6,10 Kg




**802008** CITY 03 12+0 - 18 WATT 220-240V 50-60HZ ELECTRONIC

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	● rotosymmetrical	1.728	96.00
high power led	◐ cycle route pedestrian	1.728	96.00
high power led	◑ street	1.728	96.00

\* Other light colors available on request: Neutral-white

**Colors options**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)



**802009** CITY 03 12+12 - 36 WATT 220-240V 50-60HZ ELECTRONIC

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	● rotosymmetrical	3.456	96.00
high power led	◐ cycle route pedestrian	3.456	96.00
high power led	◑ street	3.456	96.00

\* Other light colors available on request: Neutral-white

**Colors options**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)




**802010** CITY 03 24+0 - 36 WATT 220-240V 50-60HZ ELECTRONIC

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	● rotosymmetrical	3.456	96.00
high power led	◐ cycle route pedestrian	3.456	96.00
high power led	◑ street	3.456	96.00

\* Other light colors available on request: Neutral-white

**Colors options**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)



**802011** CITY 03 24+12 - 54 WATT 220-240V 50-60HZ ELECTRONIC

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	● rotosymmetrical	5.184	96.00
high power led	◐ cycle route pedestrian	5.184	96.00
high power led	◑ street	5.184	96.00

\* Other light colors available on request: Neutral-white

**Colors options**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

