




204003

LINE VETRO SLIM

Linear slim ground-recessed luminaire for outdoor installation, length 1.000mm, anodized extruded aluminum body, opal resin diffuser, anodized aluminum housing for recess. Built-in LED driver 220-240V 50-60Hz, Low power 72 Epistar SMD5050 LED. IP67 rating.

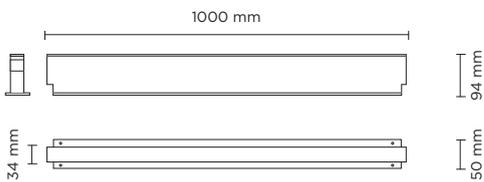

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| SMD 5050 LED | 90° | 300 | 20.00 |

Finish color options:

Opal

Technical features



Technical data

| | |
|--------------------------|--|
| Wattage | 15 WATT |
| IP Rating | IP67 |
| IK Rating | IK09 |
| Material | High corrosion resistance extruded copper-free aluminum body |
| Light source | NR. 72 x Epistar SMD5050 LED |
| Screws | Stainless steel |
| Housing | Anodized aluminum |
| Transformer | Electronic power supply 220/240V 50/60Hz built-in |
| Static weight resistance | Max 3000 Kg |
| Diffuser | Opal resin |
| Power cable | Double 0.5 mt. neoprene power cable included, supplied with male/female quick coupling for in-line installation. |
| Gross weight | 4,20 Kg |

