


## 301004 HYDROSCUBA MINI LED - RECESS

Small underwater luminaire, wall-recessed, completely made in stainless steel AISI 316L, silicone o-rings, acetal resin housing for recess. 350/500mA remote driver needed, with 4 CREE XP-G3 LED. IP 68 rating.

### Energy Label **A++**

- Material: completely made in stainless steel AISI 316 L marine grade
- Stainless steel AISI 316 L marine grade trim.
- NR. 4 x 1.5W CREE "XP-G3" LED
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Protection system IP68 with maximum immersion depth 3 mt.
- M12 cable gland made in stainless steel AISI 316.
- Recess housing made in acetal resin.
- Cable sheath made in PVC.
- 8 mt. neoprene power cable included

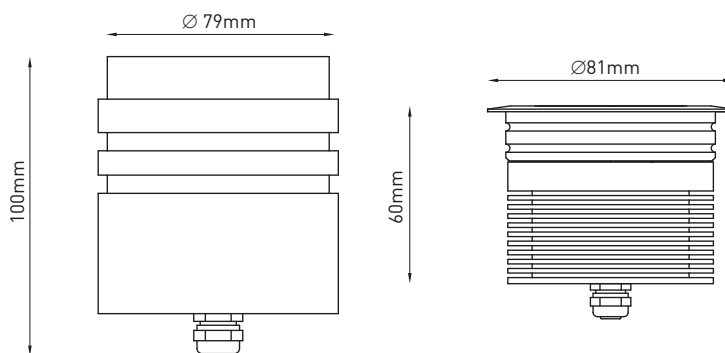

6 WATT  
REMOTE DRIVER 350/500 MA NEEDED  
IP68 - 3 METERS DEPTH  
2.00 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	576	96.00	STAINLESS STEEL
		30°	548	91.34	
	4.000°K NEUTRAL-WHITE	10°	600	100.00	
		30°	570	95.00	

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: BLUE

### REMOTE DRIVER SELECTION

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
TCI ITALY	122356	CONSTANT CURRENT 500 MA	12W	IP20	1
TCI ITALY	122204	CONSTANT CURRENT 350 MA / 500 MA	25W - 35W	IP20	MIN 1 - MAX 4
MEANWELL	LPC-20-350	CONSTANT CURRENT 350 MA	16.8W	IP67	MIN 1 - MAX 2
MEANWELL	LPC-20-700	CONSTANT CURRENT 700 MA	21W	IP67	MIN 1 - MAX 2
MEANWELL	LPF-25-48	CONSTANT CURRENT 530 MA	25W	IP67	MIN 3 - MAX 4